


## technical information

HD Flex Fiber Optic Cassettes offer a wide array of deployment options to support both Ethernet and Fibre Channel networks. Cassettes are available in 4-port, 6-port, and 12-port configurations with several connector options on the front and back of the cassettes. Splice cassettes and adapter/coupler modules are also available.

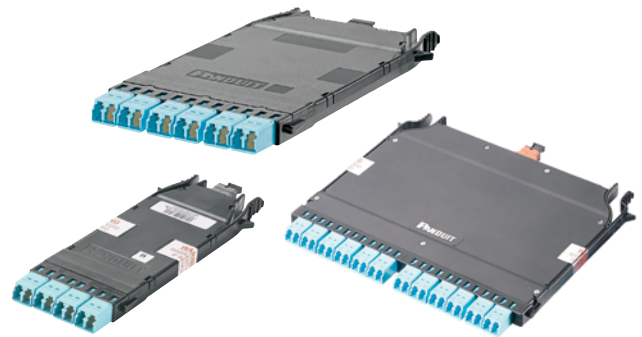

## applications

Allows system designers to tailor configuration, reach and breakout construction to application requirements; to minimize waste, optimize cable management, speed deployment, and improve flexibility and manageability for lower installation costs.

## construction

<b>Fiber types:</b>	Multimode: OM3 50/125µm OM4 50/125µm OM4+ Sig Core 50/125µm Singlemode: OS2 9/125µm
<b>Front connectivity:</b>	LC, LC/APC Duplex Adapters (Shuttered) SC, SC/APC Duplex Adapters MPO Adapters (Key-up to Key-up, Key-up to Key-down)
<b>Rear connectivity:</b>	MPO Adapter with MPO male connector MPO Adapters (Key-up to Key-up Method B, Key-up to Key-down Method A) 12-fiber and 24-fiber for splicing (ribbon, 250µm)

## environmental properties

<b>Operating temperature:</b>	0°C – 70°C (32°F – 158°F)
<b>Storage and shipping temperature:</b>	-40°C – 70°C (-40°F – 158°F)
<b>Installation temperature:</b>	0°C – 60°C (32°F – 140°F)



## performance properties

<b>Insertion loss:</b>	Multimode: Optimized Cassette and Breakout Cassette: 0.5dB Ultra Low Loss Cassette and Breakout Cassette: 0.35dB Optimized Loss Splice Cassette: 0.15dB plus splice loss Ultra Low Loss Splice Cassette: 0.10dB plus splice loss
	Singlemode: Standard (1) 24F MPO Cassette: 1.2dB Standard Cassette and Breakout Cassette: 0.75dB Standard Loss Splice Cassette: 0.35dB plus splice loss
<b>Return loss: (per fiber)</b>	Multimode: >26dB (LC) Singlemode: >55dB (LC) >65dB (LC/APC)
<b>Connector durability:</b>	Connectors meeting ANSI/TIA-586C.3 Durability: 500 mating cycles
<b>Fiber count:</b>	24 (cassette and tethered cassette) 24 (splice cassettes) 24 discrete splice, 48 ribbon splice (splice only)
<b>Split sleeve material:</b>	Zirconia ceramic

## standards



<b>Meets or exceeds:</b>	ISO/IEC 11801, ANSI/TIA-568-C.3, TIA-604-5 (FOCIS-5), TIA-604-10 (FOCIS-10), RoHS Compliant
--------------------------	---

# HD Flex™ Fiber Optic Cassettes




HD Flex Cassettes – Duplex LC, LC/APC	6-port, 12-fiber (1 MPO)	12-port, 24-fiber (2 MPOs)	12-port, 24-fiber (1 MPO24)
<b>OM4 Fiber/Optimized Loss – LC</b>			
Method A polarity.	FHCZO-12-10AS	FHCZO-24-10AS	–
Modified Method A polarity (pair flipped).	FHCZO-12-10AF	FHCZO-24-10AF	FHCZO-24F-10A
Universal polarity (B).	FHCZO-12-10U	FHCZO-24-10U	–
<b>OM4+ Signature Core Fiber/Ultra Low Loss – LC</b>			
Method A polarity.	FHCZA-12-10AS	FHCZA-24-10AS	–
Modified Method A polarity (pair flipped).	FHCZA-12-10AF	FHCZA-24-10AF	–
Universal polarity (B).	FHCZA-12-10U	FHCZA-24-10U	–
<b>OM4 Fiber/Ultra Low Loss – LC</b>			
Method A polarity.	FHCXA-12-10AS	FHCXA-24-10AS	–
Modified Method A polarity (pair flipped).	FHCXA-12-10AF	FHCXA-24-10AF	–
Universal polarity (B).	FHCXA-12-10U	FHCXA-24-10U	–
<b>OM3 Fiber/Optimized Loss – LC</b>			
Method A polarity.	FHCYO-12-10AS	FHCYO-24-10AS	–
Modified Method A polarity (pair flipped).	FHCYO-12-10AF	FHCYO-24-10AF	FHCYO-24F-10A
Universal polarity (B).	FHCYO-12-10U	FHCYO-24-10U	–
<b>OS2 Fiber/Standard Loss – LC</b>			
Method A polarity.	FHC9N-12-10AS	FHC9N-24-10AS	–
Modified Method A polarity (pair flipped).	FHC9N-12-10AF	FHC9N-24-10AF	FHC9N-24F-10A
Universal polarity (B).	FHC9N-12-10U	FHC9N-24-10U	–
<b>OS2 Fiber/Standard Loss – LC/APC</b>			
Method A polarity.	FHC9N-12-LAAS	FHC9N-24-LAAS	–
Modified Method A polarity (pair flipped).	FHC9N-12-LAAF	FHC9N-24-LAAF	FHC9N-24F-LAA
Universal polarity (B).	FHC9N-12-LAU	FHC9N-24-LAU	–

# HD Flex™ Fiber Optic Cassettes





HD Flex 4-to-1 Breakout Cassettes	4-port, 8-fiber (1 MPO)	6-port, 8-fiber (1 MPO)	12-port, 24-fiber (3 MPO)
<b>OM4 Fiber/Optimized Loss – LC</b>			
Method B polarity.	FHC3ZO-08H-10B	FHC3ZO-08-10BN	FHC3ZO-24H-10B
<b>OM4 Fiber/Ultra Low Loss – LC</b>			
Method B polarity.	FHC3ZA-08H-10B	FHC3ZA-08-10BN	FHC3ZA-24H-10B
<b>OM3 Fiber/Optimized Loss – LC</b>			
Method B polarity.	FHC3XO-08H-10B	FHC3XO-08-10BN	FHC3XO-24H-10B
<b>OS2 Fiber/Standard Loss – LC</b>			
Method A polarity.	FHC39N-08H-10A	FHC39N-08-10AN	FHC39N-24H-10A
<b>OS2 Fiber/Standard Loss – LC/APC</b>			
Method A polarity – LC/APC.	FHC39N-08H-LAA	–	–




HD Flex Cassettes – Duplex SC, SC/APC	12-port, 12-fiber (1 MPO)
<b>OM4 Fiber/Standard Loss – SC</b>	
Method A polarity.	FHCZN-12-03AS
Modified Method A polarity (pair flipped).	FHCZN-12-03AF
Universal polarity (B).	FHCZN-12-03U
<b>OM3 Fiber/Standard Loss – SC</b>	
Method A polarity.	FHCXN-12-03AS
Modified Method A polarity (pair flipped).	FHCXN-12-03AF
Universal polarity (B).	FHCXN-12-03U
<b>OS2 Fiber/Standard Loss – SC</b>	
Method A polarity.	FHC9N-12-03AS
Modified Method A polarity (pair flipped).	FHC9N-12-03AF
Universal polarity (B).	FHC9N-12-03U
<b>OS2 Fiber/Standard Loss – SC/APC</b>	
Method A polarity.	FHC9N-12-3GAS
Modified Method A polarity (pair flipped).	FHC9N-12-3GAF
Universal polarity (B).	FHC9N-12-3GU

# HD Flex™ Fiber Optic Cassettes



HD Flex Splice Cassettes – LC, LC/APC	6-port, 12-fiber	12-port, 24-fiber
<b>OM4 Fiber/Optimized Loss – LC</b>		
Pre-loaded with pigtails (250µm) and splice sleeves.	FHSZO-12-10P	–
Pre-loaded with flat ribbon pigtail and splice sleeve.	FHSZO-12-10R	–
<b>OM4 Fiber/Ultra Low Loss – LC</b>		
Pre-loaded with pigtails (250µm) and splice sleeves.	FHSZA-12-10P	FHSZA-24-10P
Pre-loaded with flat ribbon pigtails and splice sleeve(s).	FHSZA-12-10R	FHSZA-24-10R
<b>OM3 Fiber/Optimized Loss – LC</b>		
Pre-loaded with pigtails (250µm) and splice sleeves.	FHSXO-12-10P	–
Pre-loaded with flat ribbon pigtail and splice sleeve.	FHSXO-12-10R	–
<b>OS2 Fiber/Standard Loss – LC</b>		
Pre-loaded with pigtails (250µm) and splice sleeves.	FHS9N-12-10P	FHS9N-24-10P
Pre-loaded with flat ribbon pigtails and splice sleeve(s).	FHS9N-12-10R	FHS9N-24-10R
<b>OS2 Fiber/Standard Loss – LC/APC</b>		
Pre-loaded with pigtails (250µm) and splice sleeves.	FHS9N-12-LAP	FHS9N-24-LAP
Pre-loaded with flat ribbon pigtails and splice sleeve(s).	FHS9N-12-LAR	FHS9N-24-LAR
<b>Splice Only Cassette – No front connectivity</b>		
Packaged with 2 ribbon and 24 pigtail splice sleeves.	–	FHSN-24




HD Flex Splice Cassettes – Duplex SC, SC/APC	12-port, 12-fiber
<b>OM4 Fiber/Ultra Low Loss – SC</b>	
Pre-loaded with pigtails (250µm) and splice sleeves.	FHSZA-12-03P
Pre-loaded with flat ribbon pigtail and splice sleeve.	FHSZA-12-03R
<b>OS2 Fiber/Standard Loss – SC</b>	
Pre-loaded with pigtails (250µm) and splice sleeves.	FHS9N-12-03P
Pre-loaded with flat ribbon pigtail and splice sleeve.	FHS9N-12-03R
<b>OS2 Fiber/Standard Loss – SC/APC</b>	
Pre-loaded with pigtails (250µm) and splice sleeves.	FHS9N-12-3AP
Pre-loaded with flat ribbon pigtail and splice sleeve.	FHS9N-12-3AR

# HD Flex™ Fiber Optic Cassettes




HD Flex LC and MPO Fiber Adapter Panels	4-port	6-port
<b>LC Fiber Adapter Panels</b>		
6 LC duplex multimode adapters in Aqua.	FHSXN-08-10N	FHSXN-12-10N
6 LC duplex singlemode adapters in Blue.	FHS9N-08-10N	FHS9N-12-10N
6 LC/APC duplex singlemode adapters in APC Green.	FHS9N-08-LAN	FHS9N-12-LAN
<b>MPO Fiber Adapter Panels</b>		
6 MPO Type A adapters (Key-up to Key-down) in Black.	FHMP-4-ABL	FHMP-6-ABL
6 MPO Type B adapters (Key-up to Key-up) in Charcoal Gray.	FHMP-4-BCG	FHMP-6-BCG
6 MPO Type A adapters (Key-up to Key-down) in Red.	FHMP-4-ARD	FHMP-6-ARD



HD Flex Dark Fiber Conversion Cassettes	6-port
<b>OM4 Fiber/Ultra Low Loss (0.35dB)</b>	
24-fiber (3×MPO8 to 2×MPO12), Method A.	FH4ZU-24-NMNMA
24-fiber (3×MPO8 to 2×MPO12), Method B.	FH4ZU-24-NMNMB
48-fiber (6×MPO8 to 4×MPO12), Method A.	FH4ZU-48-NMNMA
48-fiber (6×MPO8 to 4×MPO12), Method B.	FH4ZU-48-NMNMB

# HD Flex™ Fiber Optic Cassettes



HD Flex Mesh/Shuffle Cassettes	6-port
<b>OM4 Fiber/Optimized Loss (0.7dB)</b>	
32-fiber 4×MPO8 to 4×MPO8.	FHMZO-32-M
<b>OM3 Fiber/Optimized Loss (0.7dB)</b>	
32-fiber 4×MPO8 to 4×MPO8.	FHMXO-32-M
<b>OS2 Fiber/Standard Loss (1.0dB)</b>	
32-fiber 4×MPO8 to 4×MPO8.	FHM9N-32-M

HD Flex Blank/Filler Panels	4-port	6-port	12-port
Blank/filler panels.	FHSBBL04W	FHSBBL06W	FHSBBL12W

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



For more information  
Visit us at [www.panduit.com](http://www.panduit.com)  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

© 2022 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP190-WW-ENG  
11/2022