

Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules

specifications

Category 6A/Class E_A, 8-position, shielded jack module shall terminate 4-pair, 22 – 26 AWG, 100 ohm shielded twisted pair cable and shall not require use of a punchdown tool. Shielded jack modules shall use a forward motion termination method to optimize performance by maintaining cable pair geometry while eliminating conductor untwist. The termination cap shall be color-coded blue to designate Category 6A performance and shall include a universal label coded for T568A and T568B wiring schemes. The Mini-Com® TX6A™ 10Gig™ Shielded Jack Module must be installed as part of the TX6A™ 10Gig™ Shielded Copper Cabling System to achieve IEEE 10GBASE-T certified performance.



technical information

| | |
|---|--|
| Category 6A/Class E_A performance: | Exceeds ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E _A channel requirements for supporting 10GBASE-T transmission over twisted pair cabling systems in a 4-connector configuration up to 100 meters at swept frequencies 1 to 500 MHz Meets ANSI/TIA-568.2-D and ISO 11801 Category 6A component requirements at swept frequencies up to 500 MHz |
| FCC compliance: | Complies with ANSI/TIA-1096-A (formerly FCC Part 68); contacts plated with 50 microinches of gold |
| IEC compliance: | Meets IEC 60603-7 and IEC 60512-99-001 |
| Operating temperature: | -10° C to 65° C (14° F to 149° F) |
| PoE compliance: | Rated for 2500 cycles with IEEE 802.3af / 802.3at and 802.3bt type 3 and type 4 for up to 100W |
| UL Listed: | UL 1863 (Use as communications circuit accessory) UL 2043 (Suitable for use in air-handling spaces) |
| RoHS compliance: | Compliant |
| Conductor termination range: | Standard wire cap compatible with 22 – 26 AWG solid or stranded cable with conductor insulation diameters of 0.060 in. max and overall cable O.D. 0.200 in. to 0.330 in.; Marine jack module wire cap compatible with 22 AWG solid or stranded cable with 0.071 in (1.80mm) maximum insulated conductor outside diameter cable |

key features and benefits

| | |
|--|---|
| 100% performance tested | Confidence that each jack module will deliver the critical electrical performance requirements |
| Utilizes enhanced Giga-TX™ Technology | Optimizes performance by eliminating conductor untwist and reduces installation time and expense |
| Integral shield | Provides a 360° conductive path to ground shielded jack module with no additional assembly required |
| Snap in grounding | Shield provides seamless bonding of the jack module with Mini-Com® All Metal Modular Patch Panels |
| Modular | Shielded jack modules snap in and out of all Mini-Com® Faceplates, Metal Modular Patch Panels and Surface Mount Boxes for easy moves, adds, and changes |
| Individually serialized | Marked with quality control number for future traceability |
| Identification | Can be clearly identified with optional labels and icons for port identification |
| High density | Able to support 48 ports in 1RU density |
| Shuttered version (optional): | Integrated spring shuttered door keeps out dust and debris of un-mated RJ45 jack modules automatically |
| Marine compatible version available | Terminates to TX7000™ Shielded MUD-Resistant Marine Copper Cable (S/FTP), which includes a durable flame-, oil-, UV- and MUD-resistant cable jacket; ideal for use in harsh environments encountered in marine applications including ship and offshore/onshore units |
| Termination tools (optional) | EGJT-1 termination tool ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability; TGJT termination tool ideal for high volume installations |
| Block out device (optional) | Provides a simple and secure method to control access to data ports while not in use |
| Grounding availability | Able to ground anywhere. For grounding shielded jack modules not installed in a Mini-Com® All Metal Modular Patch Panel, use the shielded jack module grounding kit, part number CJSJK-XY |

applications

Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules are a component of the TX6A™ 10Gig™ Shielded Copper Cabling System. This end-to-end system provides a cost effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. This shielded system provides high performance, excellent EMI suppression and aids in secure data transmission. The Panduit solution helps ensure organizations efficiently and reliably meet their data transmission needs. With certified performance to the

ISO 11801 Class E_A, IEEE 802.3an-2006 and ANSI/TIA-568.2-D Category 6A standards, this system will support high bandwidth applications with data centers and connections to high end workstations such as stacking switches and switch-to-switch links, storage area networks, aggregation of Gigabit Ethernet channels, real-time intensive financial transactions, streaming video, animation, scientific modeling and medical imaging.



SPECIFICATION SHEET

TX6A™ 10Gig™ Shielded Copper Cabling System

Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules

| | |
|--------------------------------------|---------------|
| Jack module: | CJS6X88TG*Y |
| Spring-shuttered jack module: | CJSH6X88TG**Y |
| Marine jack module: | CJSM6X88TGY |

Tools and Accessories

| | |
|--------------------------------------|--------------------------|
| Jack module termination tool: | EGJT-1 or TGJT |
| Wire snipping tool: | CWST |
| Wire stripping tool: | CJAST |
| Clear dust cap: | MDC-C |
| Block out device: | PSL-DCJB- ^{AAA} |
| Phone icons: | CIPIW-C ⁺⁺ |
| Data icons: | CIDIW-C ⁺⁺ |

*To designate color, add BU (Blue), RD (Red), WH (White), YL (Yellow), GR (Green) or VL (Violet). For part number CJS6X88TGY (no designation), the color is black.

**To designate color, add BU (Blue), RD (Red) YL (Yellow), GR (Green) or VL (Violet). For part number CJSH688TGY (no designation), the color is black.

^{AAA}To designate color other than Red, add suffix BL (Black), BU (Blue), YL (Yellow), GR (Green), OR (Orange), IW (Off White), or IG (International Gray) at the end of the part number. 10/package.

⁺⁺To designate color other than IW (Off White), replace IW with EI (Electric Ivory), IG (International Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), or VL (Violet) in the part number. 100/package.



Contact customer service for bulk packaged and/or keyed jack modules. Panduit recommends installing shielded jack modules in Mini-Com® All Metal Modular Patch Panels.

Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules



Test Results

| Mechanical Test | Test Method | Measurement | Test Results |
|------------------------------|-------------|------------------------------------|--------------|
| Normal Force | – | Load (grams) | > 100 |
| Vibration | IEC 512-6d | Circuit Resistance (mOhms) | < 40 |
| Shock | IEC 512-6c | Contact Disturbance (microseconds) | < 5 |
| Durability | IEC 512-9a | Circuit Resistance (mOhms) | < 40 |
| Mating/Un-mating | IEC 512-3b | Mating Force (N) | < 20 |
| | | Un-mating Force (N) | < 20 |
| Termination Cycles | IEC 352 | Number of Cycles | > 20 |
| Mating Cycles | IEC 60603-7 | Number of Plug Insertions | > 2500 |
| Electrical Test | Test Method | Measurement | Test Results |
| Low Level Circuit Resistance | IEC 512-2a | Resistance (mOhms) | < 20 |
| Dielectric Withstand Voltage | IEC 512-4a | 1000 VAC, 1 minute | Passed |
| Insulation Resistance | IEC 512-3a | Resistance (MOhms) | > 500 |
| Electrical Test | Test Method | Measurement | Test Results |
| Temperature Life | IEC 512-9b | Circuit Resistance (mOhms) | < 40 |
| Humidity | IEC 512-11c | Circuit Resistance (mOhms) | < 40 |
| Thermal Shock | IEC 512-11d | Circuit Resistance (mOhms) | < 40 |
| Climatic Sequence | IEC 512-11a | Circuit Resistance (mOhms) | < 40 |
| Flowing Mixed Gas Corrosion | IEC 512-11g | Circuit Resistance (mOhms) | < 40 |

Shielded Jack Module

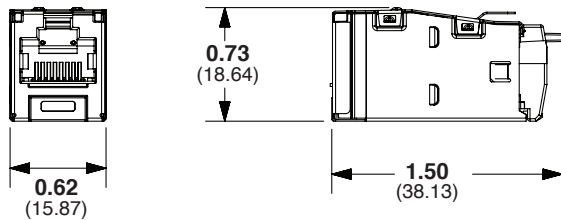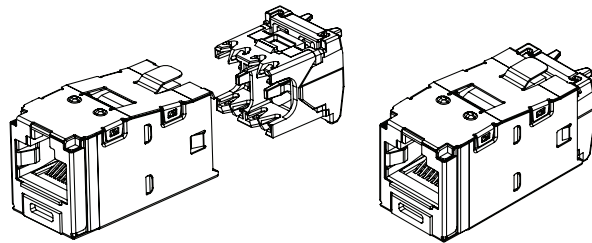

Spring-Shuttered Shielded Jack Module

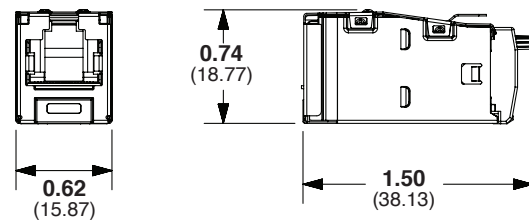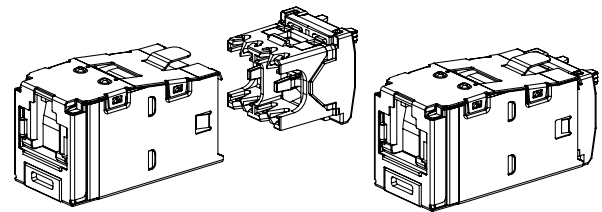

Dimensions are in inches (Dimensions in parenthesis are metric)

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2020 Panduit Corp.
ALL RIGHTS RESERVED.
COSP230--WW-ENG
4/2020