
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP									
DANBUUT	MILITARY	STUD SIZE		DIMENSIONS in. [mm]					UL & CSA TOOLS (DIES)
PANDUIT PART #	PART # AND CLASS	ENGLISH	METRIC	L ± [1,0]	$W\pm\frac{.01}{[0,3]}$	$C \pm \frac{.015}{[0,4]}$	$M\pm\frac{.03}{[0,8]}$	$H \pm {.01 \over [0,3]}$	CT-600-A (CT-550CH) + CT-1550
PMNF6-3R			МЗ	1.05 [26,7]	.23 [5,8]	.36 [9,1]	.95 [24,1]	.13 [3,3]	*CT-1551
PNF10-6R	MS25036-111 CLASS 1 & 2	#6	M3,5	1.06 [26,9]	.37 [9,4]	.31 [7,8]	.88 [22,4]	.15 [3,8]	CT-2300 (CD-550) UP147LW (CD-550)
PNF10-8R	MS25036-156 CLASS 1 & 2	#8	M4	1.06 [26,9]	.37 [9,4]	.31 [7,8]	.88 [22,4]	.17 [4,3]	CT-2500 (CT-2550CH)
PNF10-10R	MS25036-112 CLASS 1 & 2	#10		1.06 [26,9]	.37 [9,4]	.31 [7,8]	.88 [22,4]	.20 [5,1]	* NOT UL/CSA WITH #10AWG
PMNF6-5R			M5	1.06 [26,9]	.38 [9,6]	.36 [9,1]	.87 [22,1]	.21 [5,3]	SOLID COPPER WIRE
PNF10-14R	MS25036-157 CLASS 1 & 2	1/4"	M6	1.21 [30,7]	.52 [13,2]	.38 [9,6]	.95 [24,1]	.27 [6,9]	MILITARY CLASS 2 TOOL
PNF10-56R	MS25036-113 CLASS 1 & 2	5/16"	М8	1.21 [30,7]	.52 [13,2]	.38 [9,6]	.95 [24,1]	.34 [8,7]	CT-460 M SERR
PNF10-38R	MS25036-114	3/8"	M5	1.29 [32,8]	.58 [14,7]	.43 [10,9]	1.00 [25,4]	.40 [10,2]	

NOTES:

- 1. UL LISTED & CSA CERTIFIED FOR:
 - A. #12-10 AWG [4,0-6,0 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600 V. MAX. VOLTAGE RATING 1000 V. IN SIGNS, FIXTURES & LUMINARIES
- 2. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 3. MATERIAL:
 - A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED
 - B. HOUSING: NYLON, YELLOW C. SLEEVE: BRASS, TIN PLATED
- 4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- 5. WIRE STRIP LENGTH: $9/32" {}^{+1/32}_{-0} [7,1^{+0,8}_{-0}]$

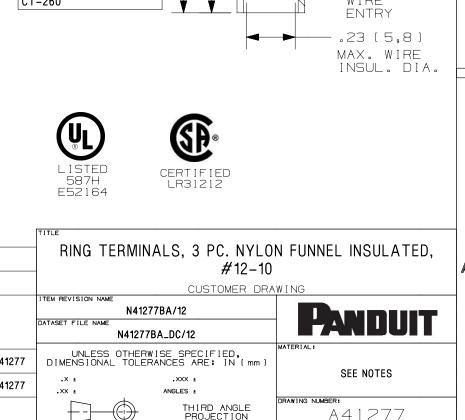

UL & CSA TOOLS (DIES)	⊸ w →
CT-600-A (CT-550CH) *CT-1550 *CT-1551 CT-2300 (CD-550) UP147LW (CD-550) CT-2500 (CT-2550CH)	H DIA
NOT UL/CSA WITH #10AWG SOLID COPPER WIRE	STAMPING
MILITARY CLASS 2 TOOL	C RAD
CT-460	M SERRATED BARREL
PANDUIT APPROVED TOOLS	HOUSING
CT-100 CT-160 CT-260	FUNNEL WIRE ENTRY
	MAX. WIRE INSUL. DIA.

							RING TERMINALS, 3 PC. NYLON FUNNEL INSULATED, #12-10
							CUSTOMER DRAWING
40	7/04	JHNU	JHNU	JADE	ADDED CT-2300 (CD-550), UP147LW (CD-550) TO TOOLS REMOVED "A" FROM CT-100A ADDED NOTE TO SPECIFY CT-1550/CT-1551 ARE NOT UL CSA WITH 10 AWG SOL WIRE	102866	N41277BA/12 DATASET FILE NAME N4077BA DO (10)
12	2 7/21						N41277BA_DC/12 MATERIAL:
11	01/18	TMR	JHNU	RGB	AGENCY CERTIFICATION UPDATED	N41277BA-A41277	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
10	07/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41277BA-A41277	.x ± .xxx ± SEE NOTES .xx ± ANGLES ±
09	10/12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41277	THIRD ANGLE PROJECTION A41277
REV	DATE	ВҮ	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE DAW - RLS N.T.S. SHT 1 0F 1

2