


Aluminum Grip-Seals® For Flat Festoon Cable

- RoHS Compliant
- Liquid Tight Seal

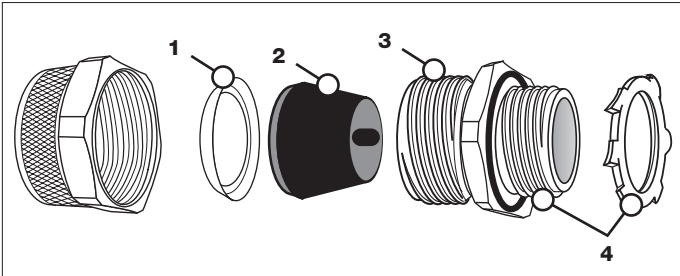


Each Grip-Seal® package includes the grip-seal body, O-ring and locking nut. Specially designed sealing bushings for flat festoon cables. Our aluminum compression bushing and threaded body is resistant to corrosion and weathering, and has a maximum operating temperature of 250°F. The nickel-plated friction ring provides a uniform compression for a proper environmental seal against dust, moisture and chemicals.

FEATURES & BENEFITS

- 1. NICKEL-PLATED FRICTION RING —** Provides uniform compression for a proper seal. Prevents bushing damage and results in a tight, uniform seal on the cord surface.
- 2. SEALING BUSHINGS FOR FLAT FESTOON CABLE —** Specially designed bushing provides environmental seal against dust, moisture, chemicals. 250°F maximum operating temperature.
- 3. ALUMINUM COMPRESSION BUSHING AND THREADED BODY —** Resistant to corrosion and weathering. Easy attachment to pendants and electrical enclosures. Available in both a 90° and straight configuration.
- 4. SEALING O-RING —** Seals out oil, chemicals and other contaminants. Locknut included with each unit.

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.	CONFIGURATION	FITTING SIZE	CABLE (IN)	FITS TPC FLAT FESTOON PART NO.	NUMBER OF BUSHINGS
55031	Straight	1/2" NPT	0.200 – 0.475	61114	1
55033	Straight	3/4" NPT	0.246 – 0.709	61104	1
55034	Straight	1" NPT	0.220 – 0.600	61124 & 415007	1
55038	Straight	1" NPT	0.190 – 0.870	61118	1
55035	Straight	1" NPT	0.204 – 0.982	61148	1
55037	Straight	1 1/2" NPT	0.190 – 1.255	61112	1
55032	Straight	1-1/2" NPT	0.204 – 1.420	61142	1
55036	Straight	1-1/2" NPT	0.350 – 1.130	61164	1



SEE PAGE 92 FOR FLAT FESTOON CABLE FOR USE WITH GRIP-SEAL® CONNECTORS