



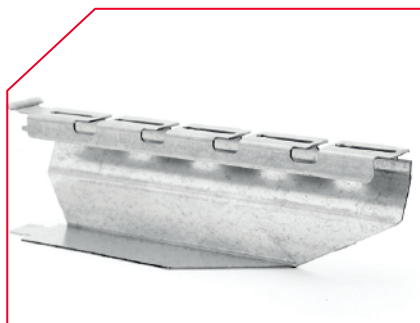

Ménsula "mavistrut" inteligente

Alto x Ancho mm	EZ	GAC	INOX 304L	INOX 316L
82.5 x 145	CH-MMI-145EZ	CH-MMI-145GAC	CH-MMI-145I304L	CH-MMI-145I316L
82.5 x 245	CH-MMI-245EZ	CH-MMI-245GAC	CH-MMI-245I304L	CH-MMI-245I316L
82.5 x 345	CH-MMI-345EZ	CH-MMI-345GAC	CH-MMI-345I304L	CH-MMI-345I316L
123 x 445	CH-MMI-445EZ	CH-MMI-445GAC	CH-MMI-445I304L	CH-MMI-445I316L
123 x 545	CH-MMI-545EZ	CH-MMI-545GAC	CH-MMI-545I304L	CH-MMI-545I316L
123 x 595	CH-MMI-595EZ	CH-MMI-595GAC	CH-MMI-595I304L	CH-MMI-595I316L
123 x 645	CH-MMI-645EZ	CH-MMI-645GAC	CH-MMI-645I304L	CH-MMI-645I316L





■ Ideal para carga pesada.



Canal dentado "mavistrut" inteligente


Longitud mm	EZ	GAC	INOX 304L	INOX 316L
(a) 3030	CH-CDM-41X41EZ	CH-CDM-41X41GAC	CH-CDM-41X41I304L	CH-CDM-41X41I316L
(b) 3030	CH-CDM-41X62EZ	CH-CDM-41X62GAC	CH-CDM-41X62I304L	CH-CDM-41X62I316L

- (a) Medida del canal: 41 x 29 mm
(b) Medida del canal: 41 x 41 mm

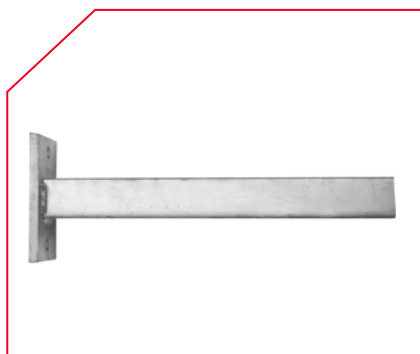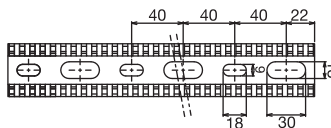

Ménsula unicanal

Ancho	EZ	GAC	INOX 304L	INOX 316L
100 mm	CH-MUN-100EZ	CH-MUN-100GAC	CH-MUN-100I304L	CH-MUN-100I316L
150 mm	CH-MUN-150EZ	CH-MUN-150GAC	CH-MUN-150I304L	CH-MUN-150I316L
200 mm	CH-MUN-200EZ	CH-MUN-200GAC	CH-MUN-200I304L	CH-MUN-200I316L
300 mm	CH-MUN-300EZ	CH-MUN-300GAC	CH-MUN-300I304L	CH-MUN-300I316L
400 mm	CH-MUN-400EZ	CH-MUN-400GAC	CH-MUN-400I304L	CH-MUN-400I316L
500 mm	CH-MUN-500EZ	CH-MUN-500GAC	CH-MUN-500I304L	CH-MUN-500I316L
600 mm	CH-MUN-600EZ	CH-MUN-600GAC	CH-MUN-600I304L	CH-MUN-600I316L
700 mm	CH-MUN-700EZ	CH-MUN-700GAC	CH-MUN-700I304L	CH-MUN-700I316L

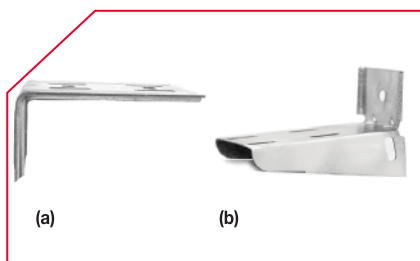


- (a) Ménsula económica ligera
(b) Ménsula económica reforzada

Ménsula económica

Ancho mm	EZ	GAC	INOX 304L	INOX 316L
(a) 50	CH-MEC-50EZ	CH-MEC-50GAC	CH-MEC-50I304L	CH-MEC-50I316L
(a) 100	CH-MEC-100EZ	CH-MEC-100GAC	CH-MEC-100I304L	CH-MEC-100I316L
(a) 150	CH-MEC-150EZ	CH-MEC-150GAC	CH-MEC-150I304L	CH-MEC-150I316L
(b) 150	CH-MER-150EZ	CH-MER-150GAC	CH-MER-150I304L	CH-MER-150I316L
(b) 250	CH-MER-250EZ	CH-MER-250GAC	CH-MER-250I304L	CH-MER-250I316L



- 1- Uso ideal para cargas ligeras
2- Uso llegada a tablero directamente de charola



* Consulte a su asesor.

■ EZ Galvanizado ElectroZinc (15-20 Micrómetros)

■ GAC Galvanizado por Inmersión en caliente (60-80 Micrómetros)

■ INOX 304L Acero Inoxidable AISI 304L

■ INOX 316L Acero Inoxidable AISI 316L