




GS4H



- Full selection of ergonomic and metal tools to install all *PANDUIT*® cable ties from Subminiature through Extra-Heavy cross sections
- Tool controlled tension provides flush cut-off and speeds installation to lower installed cost
- Easy to change tension adjustment and easy to operate
- Engineered to promote worker safety, reduce downtime, increase productivity and provide the lowest installed cost
- Used in production, maintenance, or construction applications
- Replacement blades available and requires no special maintenance

■ Part Number	GS4H
■ RoHS Compliancy Status	RoHS directive is not applicable
■ Part Description	Installs Standard, Heavy-Standard, Light-Heavy and Heavy cross section cable ties. Qualified Product Listed per Mil. Std. MS90387-2 and Mil. Spec. MIL-T-81306A. Color Identification: Red Trigger Handle and Selector Knob Body: Gray Metal Housing Weight: 16 oz. (454g)
■ Product Type	Cable Tie Tools
■ Mil. Std. Part Number	MS90387-2
■ Part Features	Metal tool with a durable powder coat finish.
■ Pricing Description	Cable Tie Tool for S, HS, LH, H ties, Adjustable tension
■ Used With Cable Ties	S, HS, LH, H
■ Weight (g)	454
■ Weight (oz.)	16.0
■ Min. Order UOM	PC
■ Min. Order Qty.	1
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

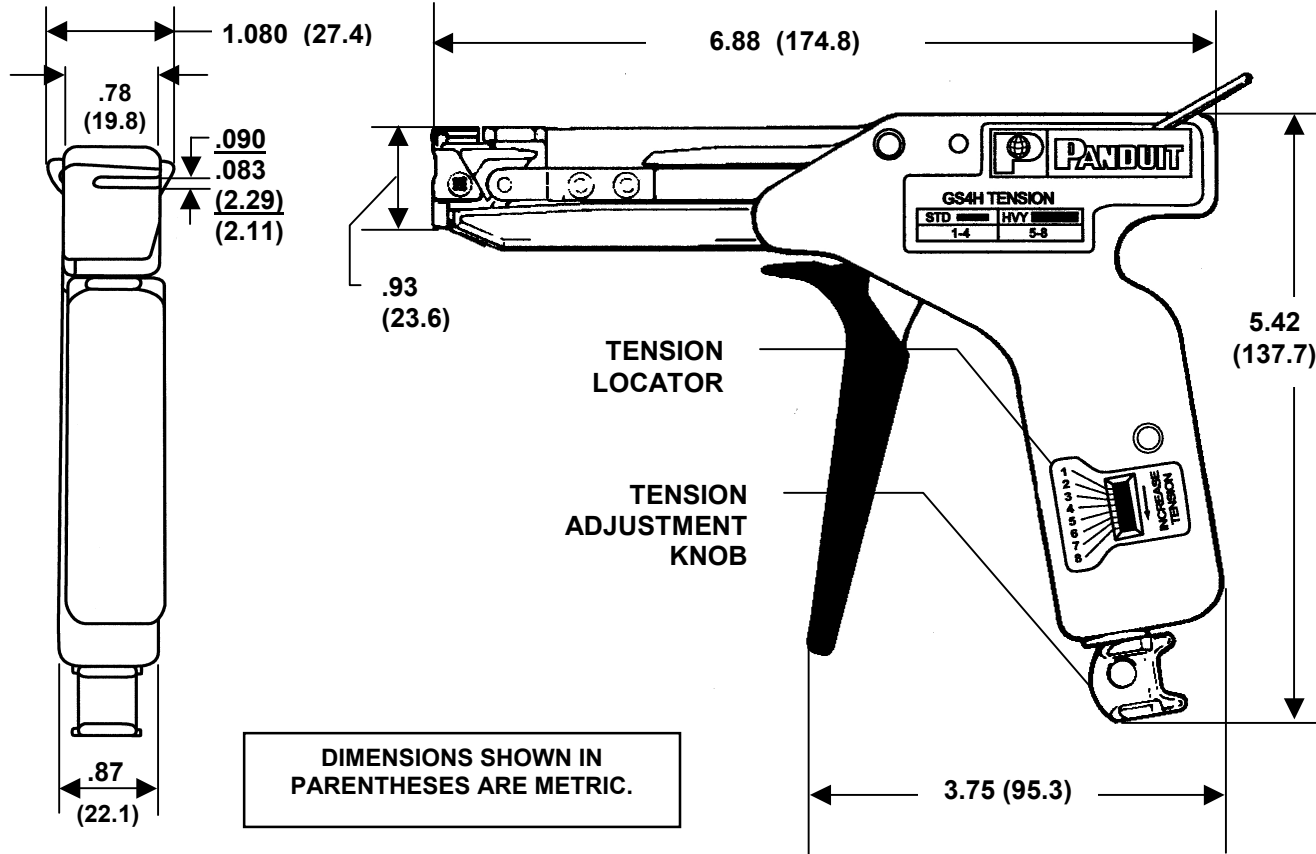

DIMENSIONS SHOWN IN PARENTHESES ARE METRIC.

SPECIFICATIONS:

PANDUIT TOOL NO.: GS4H
TOOL WEIGHT: 16 oz. (454 gr.)

INSTALLS STANDARD, HEAVY-STANDARD, LIGHT-HEAVY AND HEAVY CROSS SECTION CABLE TIES.

CABLE TIE CROSS SECTION CODE:

- S = STANDARD
- HS = HEAVY STANDARD
- LH = LIGHT HEAVY
- H = HEAVY


THIS MILITARY STANDARD MS-90387-2 TOOL CAN BE USED TO INSTALL THE FOLLOWING MS STRAPS: MS-3367-1, -2, -3, -6, -7, -23, -24, -25, -29; AND MS-3368-1, -2, -3, -4.

- THIS TOOL TIGHTENS CABLE TIES AND CUTS OFF EXCESS PORTION WHEN PRESET TENSION IS ATTAINED.
- SUPPLIED WITH SELECTOR KNOB FOR TENSION ADJUSTMENT.

REFERENCE:

K4H-BLD: Blade Replacement Kit
WH18435B02 - Blade Guard Assembly
TTLK3: Tension Locking Kit

F:\RVUSERS\ENGDOCS\CUSTDWGS\GSH-00935A-CD 09.doc

											CORP. TINLEY PARK, ILLINOIS	
									GS4H CUSTOMER DRAWING			
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
									(.x) ± --- (.xxx) ± ---			
									(.xx) ± --- ANGLES ± ---			
09	11-22-05	BLR	ABJ	ADD HS & LH TIES, KITS; AND MS STRAP #'S	4176	--	BKA		DRAWN BY: BLR	CUSTOMER DRAWING	SCALE NONE	
08	2-20-04	BLR	ABJ	REDRAWN	4121	--	DLWE	DATE: 2-20-04	DRAWING NO. GSH-00935A-CD		DWG A SIZE	
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	CHK'D: ABJ			