


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

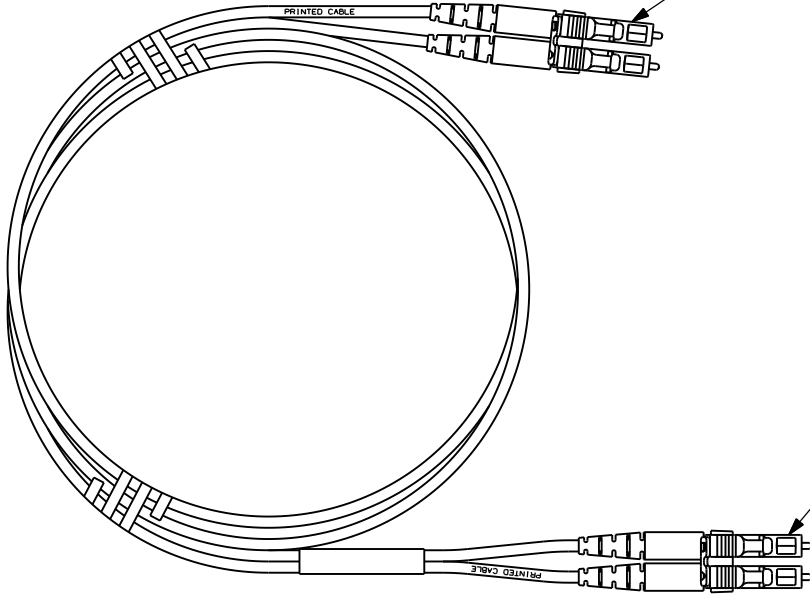


DUPLEXED LC CONNECTORS
(PRINTED CABLE SIDE B)

DUPLEXED LC CONNECTORS
(PRINTED CABLE SIDE A)

FIBER OPTIC PATCH CORD
DUPLEX LC TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUITTM
CORP.
TINLEY PARK, ILL
60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 | (.XXX) ±.010 | (.3) ±.015
ANGLES
REVIEW DRAWING NUMBERS

DRAWING FILENAME
M02779BC-DC/01A
SCALE
NONE

DRAWN BY MC

PART NO.
SEE SHEETS 2, 3 & 4
DRAWING NO.
02779-11
SHEET 1 OF 4

DATE
04-27-07

SIZE
A

CHK'D RAF

REV DATE BY CHK DESCRIPTION ECN - R CUST SUP OTH

01 09-09-09 EFK
RELEASED TO PRODUCTION

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


DUPLX LC TO LC FIBER OPTIC PATCH CORD									
PANDUIT PART NO.	CABLE			LC CONNECTOR					
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR		
F5E10-10M*Y	RISER (OFNR)	50/125um	DUPLX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK		
F6E10-10M*Y		62.5/125um						ELECTRIC IVORY	
FXE10-10M*Y		10GbE OM3			AQUA	0.25dB	26dB		AQUA
FXOE10-10M*		OPTIMIZED 10GbE OM3			AQUA	0.15dB	26dB		AQUA
FZE10-10M*		10GbE OM4				0.25dB	26dB		AQUA
FZOE10-10M*		OPTIMIZED 10GbE OM4				0.15dB	26dB		AQUA
F9E10-10M*Y		9/125um OSI			YELLOW	0.35dB	55dB		BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

FIBER OPTIC PATCH CORD
DUPLX LC TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUITTM
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 (0.8) ANGLES
REVIEW DRAWING NUMBERS

DRAWING FILENAME
MO2779BC-DC/01A
SCALE
NONE

PART NO.
SEE SHEETS 2, 3 & 4

DRAWING NO.
02779-11
SHEET 2 OF 4

SIZE
A

01 09-09-09 EFK
RELEASED TO PRODUCTION

02779-11

REV DATE BY CHK

DESCRIPTION

ECN - R

CUST SUP OTH

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


DUPLX LC TO LC FIBER OPTIC PATCH CORD							
PANDUIT PART NO.	CABLE			LC CONNECTOR			
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5PE10-10M*	PLENUM (OFNP)	50/125um OM2	DUPLX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK
F6PE10-10M*		62.5/125um OM1		AQUA	0.25dB	26dB	ELECTRIC IVORY
FXPE10-10M*		10GbE OM3		AQUA	0.15dB	26dB	AQUA
FXOPE10-10M*		OPTIMIZED 10GbE OM3		AQUA	0.25dB	26dB	AQUA
FZPE10-10M*		10GbE OM4		AQUA	0.15dB	26dB	AQUA
FZOPE10-10M*		OPTIMIZED 10GbE OM4		YELLOW	0.15dB	26dB	AQUA
F9PE10-10M*		9/125um OSI		YELLOW	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

FIBER OPTIC PATCH CORD
DUPLX LC TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUITTM
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 (0.8) ANGLES
DRAWING FILENAME: MO2779BC-DC/01A
SCALE: NONE

THIRD ANGLE PROJECTION
DRAWN BY: MC
DATE: 04-27-07
CHK'D: RAF

REVIEW DRAWING NUMBERS
SEE SHEETS 2, 3 & 4
DRAWING NO. 02779-11
SHEET 3 OF 4

SIZE
A

REV DATE BY CHK DESCRIPTION ECN - R CUST SUP OTH

01 09-09-09 EFK RELEASED TO PRODUCTION 02779-11

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLX LC TO LC FIBER OPTIC PATCH CORD									
PANDUIT PART NO.	CABLE			LC CONNECTOR					
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR		
F5LE10-10M*	LOW SMOKE ZERO HALOGEN (LSZH) IEC	50/125um OM2	DUPLX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK		
F6LE10-10M*		62.5/125um OM1						ELECTRIC IVORY	
FXLE10-10M*		10GbE OM3			AQUA	0.25dB	26dB		AQUA
FXOLE10-10M*		OPTIMIZED 10GbE OM3			AQUA	0.15dB	26dB		AQUA
FZLE10-10M*		10GbE OM4			AQUA	0.25dB	26dB		AQUA
FZOLE10-10M*		OPTIMIZED 10GbE OM4			YELLOW	0.15dB	26dB		AQUA
F9LE10-10M*		9/125um OSI					0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

FIBER OPTIC PATCH CORD
DUPLX LC TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUITTM
CORP.
TINLEY PARK, ILL
60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 (0.8) ANGLES
(.XX) ±.010 (0.3)
SCALE
MO2779BC-DC/01A

DRAWN BY MC

REVIEW DRAWING NUMBERS

DATE 04-27-07

PART NO. SEE SHEETS 2, 3 & 4

CHK'D RAF

DRAWING NO. 02779-11

DESCRIPTION

SIZE A

REV DATE BY CHK

ECN - R CUST SUP OTH

01 09-09-09 EFK

RELEASED TO PRODUCTION

02779-11