


UÑAS

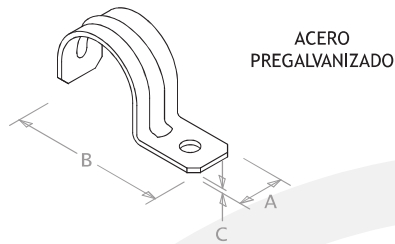

Para Conduit Pared Delgada

Tamaño Nominal mm	pulg	Usar Tornillo	Dimensiones mm			Peso Aprox. por Ciento	Clave Pedido
			A	B	C		
13	1/2"	# 12	16	40	1.2 (C.18)	0.9 kg	UC 12
19	3/4"	# 12	19	45	1.2 (C.18)	1.3 kg	UC 34
25	1"	# 12	19	52	1.2 (C.18)	1.6 kg	UC 100
32	1 1/4"	1/4"	25	75	1.5 (C.16)	3.7 kg	UC 114
38	1 1/2"	1/4"	25	81	1.5 (C.16)	4.1 kg	UC 112
51	2"	1/4"	25	92	1.5 (C.16)	5.0 kg	UC 200

Para Conduit Pared Gruesa

Tamaño Nominal mm	pulg	Usar Tornillo	Dimensiones mm			Peso Aprox. por Ciento	Clave Pedido
			A	B	C		
Industrial							
10	3/8"	1/4"	16	36	1.5 (C.16)	1.0 kg	UT 38
13	1/2"	1/4"	16	45	1.5 (C.16)	1.3 kg	UT 12
19	3/4"	1/4"	19	54	1.9 (C.14)	2.4 kg	UT 34
25	1"	1/4"	19	60	1.9 (C.14)	2.9 kg	UT 100
32	1 1/4"	5/16"	25	80	1.9 (C.14)	5.0 kg	UT 114
38	1 1/2"	5/16"	25	86	1.9 (C.14)	5.6 kg	UT 112
51	2"	5/16"	31	98	2.5 (C.12)	11.8 kg	UT 200
64	2 1/2"	3/8"	31	132	2.5 (C.12)	15.5 kg	UT 212
76	3"	3/8"	31	148	3.5 (C.10)	23.0 kg	UT 300
102	4"	3/8"	31	174	3.5 (C.10)	28.5 kg	UT 400


Comercial

13	1/2"	# 12	16	40	1.2 (C.18)	1.0 kg	UE 12
19	3/4"	# 12	19	45	1.2 (C.18)	1.5 kg	UE 34
25	1"	# 12	19	52	1.2 (C.18)	1.9 kg	UE 100
32	1 1/4"	1/4"	25	75	1.5 (C.16)	4.0 kg	UE 114
38	1 1/2"	1/4"	25	81	1.5 (C.16)	4.4 kg	UE 112
51	2"	1/4"	25	92	1.5 (C.16)	5.4 kg	UE 200

Para Tubo Cobre & Tubing

Tubo Cobre mm	pulg	Usar Tornillo	Dimensiones mm			Peso Aprox. por Ciento	Clave Pedido
			A	B	C		
10	3/8"		16	28	1.2 (C.18)	0.5 kg	UCR 14
13	1/2"		16	34	1.2 (C.18)	0.6 kg	UCR 38
16	5/8"		16	38	1.5 (C.16)	1.1 kg	UCR 12
22	7/8"		16	46	1.5 (C.16)	1.4 kg	UCR 34

OMEGAS

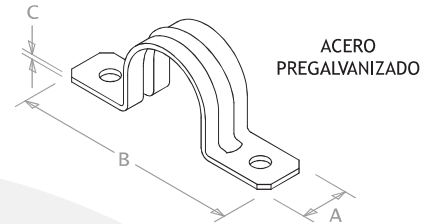

Para Conduit Pared Delgada

Tamaño Nominal mm	pulg	Usar Tornillo	Dimensiones mm			Peso Aprox. por Ciento	Clave Pedido
			A	B	C		
13	1/2"	# 8	14	56	1.2 (C.18)	1.1 kg	OC 12
19	3/4"	# 8	16	61	1.2 (C.18)	1.5 kg	OC 34
25	1"	# 8	16	67	1.2 (C.18)	2.2 kg	OC 100
32	1 1/4"	# 10	22	89	1.2 (C.18)	3.0 kg	OC 114
38	1 1/2"	# 10	22	95	1.2 (C.18)	3.4 kg	OC 112
51	2"	# 10	22	106	1.2 (C.18)	4.0 kg	OC 200

Para Conduit Pared Gruesa

Tamaño Nominal mm	pulg	Usar Tornillo	Dimensiones mm			Peso Aprox. por Ciento	Clave Pedido
			A	B	C		
Industrial							
13	1/2"	1/4"	19	65	1.5 (C.16)	2.1 kg	OT 12
19	3/4"	1/4"	19	71	1.5 (C.16)	2.4 kg	OT 34
25	1"	1/4"	19	78	1.5 (C.16)	2.8 kg	OT 100
32	1 1/4"	1/4"	25	99	1.9 (C.14)	6.0 kg	OT 114
38	1 1/2"	1/4"	25	105	1.9 (C.14)	6.6 kg	OT 112
51	2"	1/4"	25	117	1.9 (C.14)	7.8 kg	OT 200
64	2 1/2"	3/8"	31	155	2.5 (C.12)	17.0 kg	OT 212
76	3"	3/8"	31	171	2.5 (C.12)	20.0 kg	OT 300
102	4"	3/8"	31	197	2.5 (C.12)	24.5 kg	OT 400

Comercial

13	1/2"	# 8	16	63	1.2 (C.18)	1.4 kg	OE 12
19	3/4"	# 8	19	68	1.2 (C.18)	1.9 kg	OE 34
25	1"	# 8	19	75	1.2 (C.18)	2.2 kg	OE 100
32	1 1/4"	# 10	25	93	1.5 (C.16)	4.7 kg	OE 114
38	1 1/2"	# 10	25	99	1.5 (C.16)	5.1 kg	OE 112
51	2"	# 10	25	111	1.5 (C.16)	6.0 kg	OE 200

Para Bajadas PVC

Tamaño Nominal mm	pulg	Usar Tornillo	Dimensiones mm			Peso Aprox. por Ciento	Clave Pedido
			A	B	C		
152	6"	5/16"	31	270	3.5 (C.10)	45.0 kg	OT 600
203	8"	5/16"	31	320	3.5 (C.10)	56.0 kg	OT 800
254	10"	3/8"	31	375	3.5 (C.10)	68.0 kg	OT 1000
305	12"	3/8"	31	425	3.5 (C.10)	79.0 kg	OT 1200