


FBC NVENT ERIFLEX FLEXIBAR/CABLE TO BUSBAR CLAMP, 0.39" BUSBAR THICKNESS, 35 MM² STRANDED-70 MM² STRANDED, 0.61"

CATALOG NUMBER

FBC10X15-5



CERTIFICATIONS



FEATURES

Very compact clamp for connecting cable conductors or nVent ERIFLEX Flexibar to busbar without drilling

Conductor is clamped with a pressure plate

Clamps can be mounted and slid into position on busbar prior to connecting conductors

Connections can be added after busbar has been mounted

Single screw locks clamp and makes connection

EAC compliant

RoHS compliant

PRODUCT ATTRIBUTES

Article Number: 553530

Material: Steel

Finish: Electrogalvanized

Busbar Thickness: 0.39"

Complies With: IEC® 60999

Conductor Size: 35 mm² Stranded - 70 mm² Stranded

Conductor Width: 0.61"

Depth: 0.980"

Height: 1.930"

Width: 1.570"


Torque: 7.37 – 8.85 ft lb

Unit Weight: 0.247 lb

ADDITIONAL PRODUCT DETAILS

Conductor must be stripped at least a distance equal to the width of the clamp.

DIAGRAMS

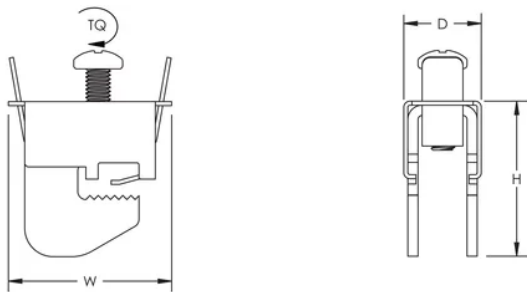

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**
TRACER