




GE
Lighting

46762 - F54W/T5/850/ECO

GE Ecolux® Starcoat® T5

- Passes TCLP, which can lower disposal costs.

a product of
ecomagination

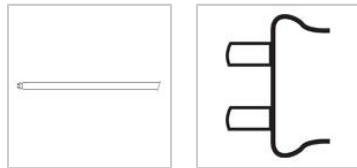

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lumen Maintenance

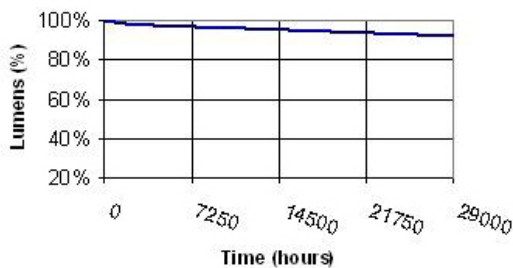

Graphs_Lamp Mortality

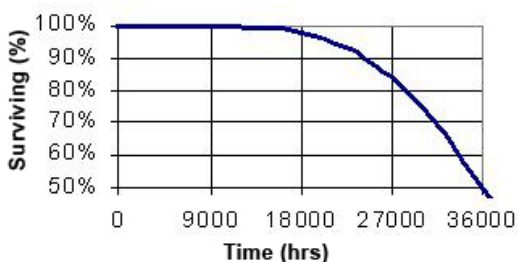

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T5
Base	Miniature Bi-Pin (G5)
Rated Life	30000.0 hrs
Rated Life (rapid start) @ Time	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	-20.0 °C
LEED-EB MR Credit	19 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	4800.0
Mean Lumens	4410.0
Nominal Initial Lumens per Watt	88
Color Temperature	5000.0 K
Color Rendering Index (CRI)	85.0
S/P Ratio (Scotopic/Photopic Ratio)	1.9

ELECTRICAL CHARACTERISTICS

Wattage	54.0
Voltage	117.0
Open Circuit Voltage (rapid start) Min @ Temperature	520 V @ 10 nV
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	45.8000 in(1163.3 mm)
Nominal Length	45.200 in(1148.1 mm)
Bulb Diameter (DIA) (MAX)	0.670 in(17.0 mm)
Bulb Diameter (DIA)	0.625 in(15.9 mm)
Max Base Face to Base Face (A)	45.240 in(1149.1 mm)
Face to End of Opposing Pin (B) (MIN)	45.420 in(1153.7 mm)
Face to End of Opposing Pin (B) (MAX)	45.520 in(1156.2 mm)

PRODUCT INFORMATION

Product Code	46762
Description	F54W/T5/850/ECO
Standard Package	Case
Standard Package GTIN	10043168467626
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	40
Package	
UPC	043168467629

Graphs_Spectral Power Distribution

