PatchLink™ Horizontal Cable Managers



specifications

Horizontal cable managers shall be capable of managing cables on the front and rear of any 19" EIA rack. The manager shall consist of a 1-piece construction that is molded out of plastic. Horizontal managers shall have pass through holes that incorporate integral bend radius control as well as fingers with rounded edges. The manager shall have rigid end fingers that incorporate integral bend radius control. Hinged covers shall allow access to the cable pathway without having to completely remove the cover from the manager.



technical information

Dimensions:	WMPH2E: 3.5"H x 19.0"W x 8.9"D (88.9mm x 482.6mm x 225.5mm) WMPH5E: 3.5"H x 19.0"W x 3.7"D (88.9mm x 482.6mm x 93.7mm) WMP1E: 3.5"H x 19.0"W x 8.9"D (88.9mm x 482.6mm x 225.5mm) WMPF1E: 3.5"H x 19.0"W x 3.7"D (88.9mm x 482.6mm x 93.7mm) WMPSE: 1.7"H x 19.0"W x 8.9"D (44.1mm x 482.6mm x 225.5mm) WMPFSE: 1.7"H x 19.0"W x 3.7"D (44.1mm x 482.6mm x 93.7mm) WMPLSE: 1.7"H x 19.0"W x 7.9"D (44.1mm x 482.6mm x 200.1mm) WMPLFSE: 1.7"H x 19.0"W x 2.7"D (44.1mm x 482.6mm x 69.1mm)	
Packaging:	Cable managers include hinged cover(s), mounting hardware, and wire retainers	

key features and benefits

Integral bend radius control	Maintains bend radii as cables transition to and from horizontal and vertical pathways		
Dual hinged cover	Opens upward or downward to provide easy access to cables in horizontal pathway without having to completely remove cover		
Increased finger spacing	Provides larger area for high performance Category 6 cables		
One piece, plastic construction	Provides durability and easy installation		
Flexible fingers	Provide for easy installation and organizes cables simplifying moves, adds, and changes		
Rounded edges on fingers	Protect cables from snags and damage to cable		
Cable pass through holes	Provide ease of installation and cable maintenance		
Wire retainers	Snap on finger to keep cables in place during moves, adds, and changes		

applications

Panduit® PatchLink™ Horizontal Cable Managers provide a neat and efficient way to manage patch cables on any EIA 19" rack. They can be used in multimedia applications to manage copper, fiber optic, and coax cables. Flexible fingers organize the patch cords simplifying moves, adds, and changes while the integral bend radius control and "closed" design protects the patch cables in the pathway. All of these features combine to

provide the user with a horizontal cable management solution that simplifies cable routing in a finished, professional appearance. When used with the Panduit® Mini-Com® patch panels, patch cords, vertical cable managers, and racks, the user receives a total system that satisfies functional and aesthetic requirements for telecommunications rooms.

2 Rack Space Manager, Front and Rear

3"x 3" front, 19" cover: WMPH2E 3"x 3" front,

17" cover: WMP1E WMP1E 5-pack: WMP1E-V

2 Rack Space Manager, Front Only

3"x 3" front, 19" cover: WMPHF2E 3"x 3" front,

17" cover: WMPF1E WMPF1E 10-pack: WMPF1E-X

1 Rack Space Manager, Front and Rear

1.7" H x 3" D front: WMPSE WMPSE 10-pack: WMPSE-X 1.7" H x 2" D front: WMPLSE

1 Rack Space Manager, Front Only

1.7" H x 3" D front: WMPFSE WMPFSE 20-pack: WMPFSE-E 1.7" H x 2" D front: WMPLFSE


Racks

19" EIA standard: CMR19X84 4 post rack 7' 30" depth with #12-24 threaded rails: R4P 4 post rack 7' 30" depth with cage nut rails: R4PCN 4 post rack 7' 23" depth with #12-24 threaded rails: R4P23 4 post rack 7' 23" depth with cage R4P23CN nut rails: 4 post rack 7' 36" depth with #12-24 threaded rails: R4P36 4 post rack 7' 36" depth with cage nut rails: R4P36CN 4 post rack 7' 42" depth with #12-24 threaded rails: R4P42 4 post rack 7' 42" depth with cage R4P42CN nut rails:

Panel Extender Brackets

1 RU:	PEB1
2 RU:	PEB2
22 RU:	PEB22
44 RU:	PEB44

PatchLink™ Horizontal Cable Managers

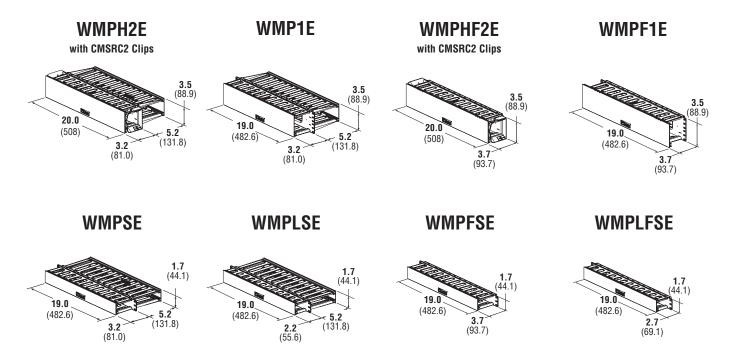

All managers have 17" long front covers except for the WMPH2E and WMPHF2E, which have19 3/8" long front covers for complete coverage to vertical managers.

Cable Capacity Chart

	Category 6 (0.250")		Category 5e (0.187")	
Part Number	Front	Back	Front	Back
WMP1E	48	48	72	72
WMPF1E	48	_	72	_
WMPFSE	16	_	24	_
WMPH2E	48	48	72	72
WMPHF2E	48	_	72	_
WMPLFSE	12	_	16	_
WMPLSE	12	12	16	16
WMPSE	16	16	24	24

Dimensions are in inches. (Dimensions in parenthesis are metric.)

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Jalisco, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com or by phone: 800-777-3300 and reference RKSP46

©2010 Panduit Corp. ALL RIGHTS RESERVED. **WW-RKSP46** Replaces SA-RKSP04 2/2010

