


Wire & Cable Materials

PermaSleeve® PSPT Wire Marking Sleeves (B-342)

These heat-shrink sleeves are the ultimate in marker durability, permanence and aesthetic appearance. Fast shrink rate saves time and costs during installation.

- **B-342 PSPT Polyolefin PermaSleeves**
 - Military / Industrial grade 3:1 shrink ratio. Meets several MIL, SAE and ASTM specs. Available as individual die-cut or continuous cut-to-length tubing.

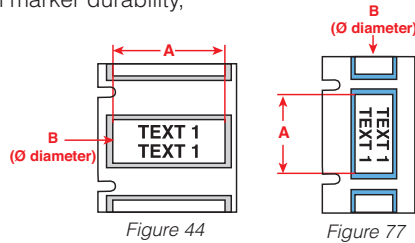

Fits Printer Model	Diagram	Catalog #	Color	Approx. Wire Gauge	Minimum Wire Diameter	Maximum Wire Diameter	Diameter as Supplied B	Sleeve Width A	Recovered Diameter	Qty. Per Roll	Suggested Ribbon Series
BMP61, 71*, TLS	Fig. 44	PSPT-094-1-WT	White	28-18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-094-175-WT	White	28-18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-094-2-WT-R	White	28-20	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-125-1-WT	White	22-16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-125-175-WT	White	22-16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-125-2-WT-R	White	22-16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-187-1-WT	White	18-12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-187-175-WT	White	18-12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-187-2-WT-R	White	20-10	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-250-1-WT	White	16-10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-250-175-WT	White	16-10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-250-2-WT-R	White	16-8	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-375-1-WT	White	12-6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-375-175-WT	White	12-6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-375-2-WT-R	White	12-4	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-500-1-WT	White	8-1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-500-175-WT	White	8-1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-500-2-WT-R	White	8-1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-750-1-WT	White	8-1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-750-175-WT	White	8-1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-750-2-WT-R	White	2 to 4/0	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-1000-1-WT	White	500-1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.000 (25.4)	50	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-1000-175-WT	White	500-1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-1000-2-WT-R	White	2 to 0.95	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-094-1-YL	Yellow	28-18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-094-175-YL	Yellow	28-18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-094-2-YL-R	Yellow	28-20	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-125-1-YL	Yellow	22-16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-125-175-YL	Yellow	22-16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-125-2-YL-R	Yellow	22-16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-187-1-YL	Yellow	18-12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-187-175-YL	Yellow	18-12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-187-2-YL-R	Yellow	20-10	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-250-1-YL	Yellow	16-10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-250-175-YL	Yellow	16-10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-250-2-YL-R	Yellow	16-8	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-375-1-YL	Yellow	12-6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-375-175-YL	Yellow	12-6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-375-2-YL-R	Yellow	12-4	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-500-1-YL	Yellow	8-1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-500-175-YL	Yellow	8-1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-500-2-YL-R	Yellow	8-1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-750-1-YL	Yellow	8-1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.000 (25.4)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-750-175-YL	Yellow	8-1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-750-2-YL-R	Yellow	2 to 4/0	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-1000-1-YL	Yellow	500-1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.000 (25.4)	50	R4300, R6600
BMP61, 71*, TLS	Fig. 44	PSPT-1000-175-YL	Yellow	500-1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	R4300, R6600
BMP61, 71*, TLS	Fig. 77	PSPT-1000-2-YL-R	Yellow	2 to 0.95	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	R4300, R6600

* Compatibility with BMP71 requires use of the BMP71 black media adapter.
 ** Each printer requires its own printer-specific ribbon.