

B1

Pan-Ty® Wing Push Mount Ties – Nylon 6.6


- For indoor use
- Cable tie, mount, and fastener in a single part
- Used to attach bundles to another surface such as a flat panel
- Anchor is easily pressed into a pre-formed hole and locks in place
- Wings provide constant tension for a stable, secure, and rattle-free installation
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

B3


C1




C2

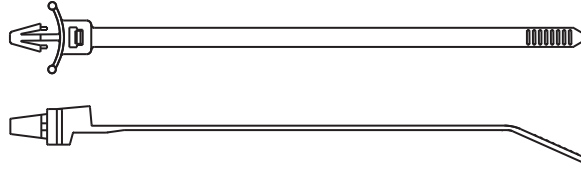


C3



C4



D1



D2

D3

E1

Part Number	Length		Width		Thickness		Nominal Hole Dia.		Max. Panel Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

Miniature Cross Section

E2

PLWP1M-C	4.3	109	0.098	2.5	0.044	1.1	0.187	4.7	0.093	2.4	0.87	22	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	100	1000
-----------------	-----	-----	-------	-----	-------	-----	-------	-----	-------	-----	------	----	----	----	--------------------------------------	-----	------

Intermediate Cross Section

E3

PLWP1.5I-C	6.0	152	0.135	3.4	0.045	1.2	0.187	4.7	0.093	2.4	1.25	32	40	178	GTS-E, GS2B-E, PTS, PPTS, STS2	100	1000
-------------------	-----	-----	-------	-----	-------	-----	-------	-----	-------	-----	------	----	----	-----	--------------------------------------	-----	------

Standard Cross Section

E4

PLWP1S-C	5.2	132	0.190	4.8	0.052	1.3	0.250	6.4	0.105	2.7	1.00	25	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	100	1000
PLWP1SA-D	5.1	130	0.190	4.8	0.052	1.3	0.187	4.7	0.093	2.4	1.00	25				500	5000
PLWP1SB-D	5.2	132	0.190	4.8	0.052	1.3	0.187	4.7	0.157	4.0	1.00	25				100	1000
PLWP1.5S-D	6.8	173	0.190	4.8	0.052	1.3	0.250	6.4	0.105	2.7	1.50	38	50	222		500	5000
PLWP1.5SA-D	6.7	170	0.190	4.8	0.052	1.3	0.187	4.7	0.093	2.4	1.50	38				100	1000
PLWP2S-C	7.8	198	0.190	4.8	0.052	1.3	0.250	6.4	0.105	2.7	1.75	45	50	222		500	5000
PLWP2SA-D	7.7	196	0.190	4.8	0.052	1.3	0.187	4.7	0.093	2.4	1.75	45			500	5000	
PLWP2SB-D	7.8	198	0.190	4.8	0.052	1.3	0.187	4.7	0.157	4.0	1.75	45					

F

Light-Heavy Cross Section

G

PLWP2H-TL	8.9	226	0.300	7.6	0.075	1.9	0.266	6.8	0.105	2.7	2.00	51	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
PLWP3H-TL	12.0	305	0.300	7.6	0.075	1.9	0.266	6.8	0.105	2.7	3.00	76				250	2500

Note: UL Recognized and CSA Certified except PLWP2H/3H.

H